

HOW TO INSTALL THE ARTRACK SYSTEM

STEP 1

Attach your Artrack rail to the wall

STEP 2

Attach and position your hanging sets

STEP 3

Position your picture or hanging item

Step 1. Attach your Artrack rail to the wall

1. Measure your wall. This will give you the length of track you will need to Artrack your wall. Artrack extrusion can be used on gyprock, masonry and concrete walls.
2. Using a string line, spirit level, mark a line at the desired height for the Artrack fixings.
3. Along the line, mark out your fixing positions as per the plastic fixing guide below. If mounting on masonry or concrete use a masonry bit to drill holes.
4. Once the fixing holes are marked and drilled you then need to attach the fixing clips to the wall. Different wall's will require different wall anchors depending on your surface, Plasterboard = Wall Mates + Screws, Concrete or Cavity Brick = Wall Plugs + Screws, Stud-ded Wall = Wood Screws. NOTE: Some Artrack rail uses metal clips. Please refer to fixing guide below for recommended fixing positions.
5. Once your fixing clips are mounted to the wall, simply install your track by pushing the track onto the fixing clips. Make sure the track is secure on the wall before attaching your hanging accessories.

Step 2. Attach and position your hanging sets


6. Once you have firmly attached the Artrack to the wall you will need to fit your hanging set.
7. Attach the cobra hook end of your cable onto the track. You can insert the cable at any point on the track.

Step 3. Position your picture or hanging item

9. Slide the cable end through the picture hook and slide the fitting to the desired height. To release down, push the plunger down and move the fitting.
10. Attach your artwork to the hook and level.


FIXING GUIDE

PLASTIC FITTING FIXING GUIDE

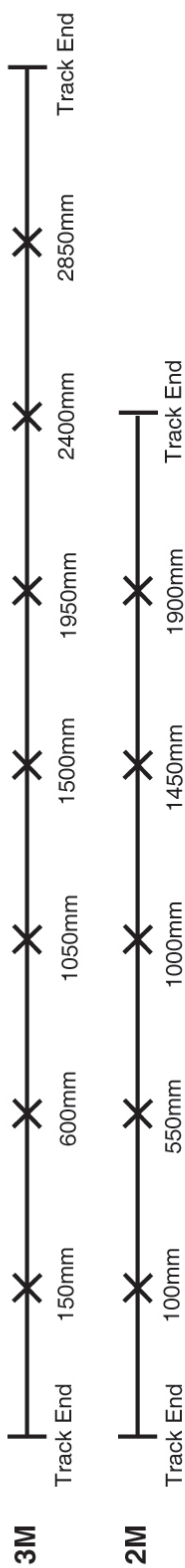

***NOTE : TRACK SIZES NOT TO SCALE**

METAL FITTING FIXING GUIDE

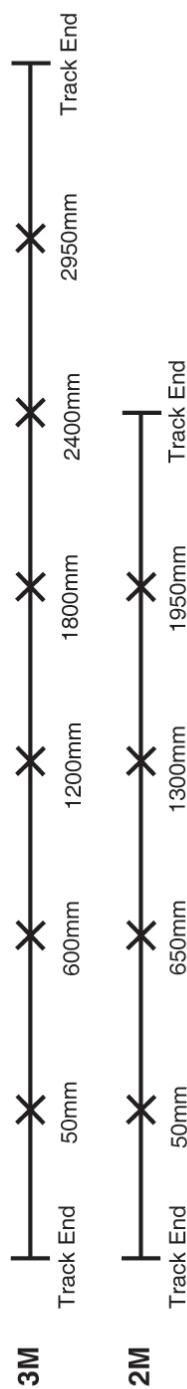

***NOTE : TRACK SIZES NOT TO SCALE**